



TecCrete[®]

Covered Panels

Key Features

Range of Strength Ratings

- Concentrated load ratings of 1250 lbs, 1500 lbs, and 2000 lbs

Proven Performance

- TecCrete has a proven record in installations worldwide for more than 25 years

Greenest Access Floor Product in America

- Manufactured in a Zero Landfill Plant
- 58% recycled content from material regionally sourced in cities and towns throughout the Midwest

High Performance Air Flow Panel

- True 23.6% open area, at 0.1 inches water gauge pressure, produces 14% more CFM than similar perforated panels
- Concentrated load rating is 1250 lbs
- Superior rolling load capacity

TecCrete Covered Panels

General Specification

Standard Panel

- Finished floor heights from 6" to 68"; additional heights available
- Concentrated Load Ratings: 1,250, 1,500, and 2,000 lbs
- Full range of data center accessories including ramps and high-performance airflow panels

Airflow Panel

- Welded grid frame and top sheet assembly with 23.6% open area perforated
- Available with adjustable damper or no damper
- Powder coated finish

Panel Surface Finish Options

- Static dissipative and conductive high pressure laminate with TecTrim™
- Static dissipative and conductive vinyl with optional vinyl trim
- Other surfaces available by special order

TecTrim is edge trim that is integral to the HPL. Rather than using a separate piece of vinyl trim, the decorative edge is routed into the HPL exposing the dark colored substrate.

Pedestal Bases

- Pedestal base is steel with hot-dipped galvanized finish
- Pedestal head is steel with bright zinc finish
- Standard pedestals for finished floor heights from 6" to 30"; additional heights available
- Seismic pedestals for finished floor heights from 6" to 68"; additional heights available
- Heads designed to accept bolted stringers (rigid grid)
- Vertical height adjustment of +/- 1" adjustment

Stringer

- Roll formed 16 gauge galvanized steel
- Available options: 2 ft, 4 ft


To prevent zinc whiskers, Haworth does not use electro-galvanized finishes on any of its access flooring.

TecCrete Performance Ratings


System Performance		Static Load Rating				Dynamic Load Rating	
Panel	Base Type	Concentrated	Uniform	Impact	Ultimate	Rolling 10-Pass	Rolling 10,000-Pass
1,250/1,500 lb	Cornerlock	1,250 lbs	600 lbs/sq ft	150	1,800 lbs*	1,200	800
	With Stringer	1,500 lbs	700 lbs/sq ft	150	2,500 lbs	1,500	1,250
2,000	With Stringer	2,000 lbs	800 lbs/sq ft	150	2,800 lbs	1,500	1,250

Tests performed according to "Recommended Test Procedures for Access Flooring" as established by the Ceiling and Interior Systems Construction Association (CISCA).

*The 1250/1500 cornerlock panel system is designed to meet an 1800 lb Ultimate load based on internal testing




Typical Covered Rigid Grid Configuration

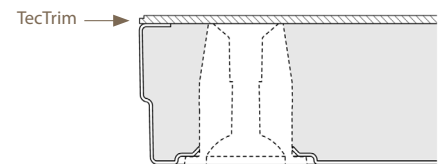

Section View of Non-Cornerlock Panel with Laminate and TecTrim

CFM Test Results

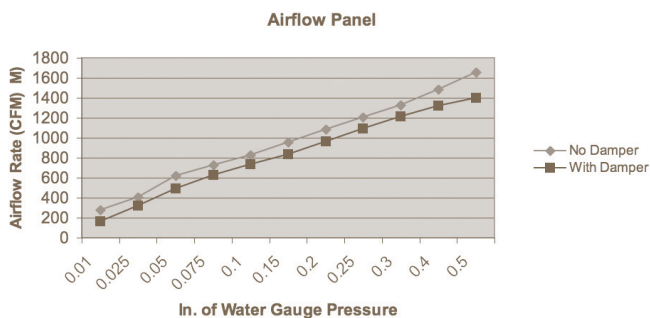

For more information call 800.344.2600 or 616.393.3000.

Download additional copies at haworth.com

Haworth is a registered trademark of Haworth, Inc.

© Haworth, Inc. 10.10

haworth.com | haworth-europe.com | haworth-asia.com

HAWORTH®